


TrueDEK Classic Shower Base

Product Overview


Curbless TrueDEK Classic shower bases are made from lightweight yet incredibly strong glass-fiber reinforced plastic (GRP) which is perfect for use with ceramic tile, natural stone, or weldable vinyl flooring.

Showers built on TrueDEK Classic bases offer the timeless advantages of zero-entry access which is designed to be wheelchair and disability friendly as well as easier to clean and safer to use - for the whole family, for years to come.

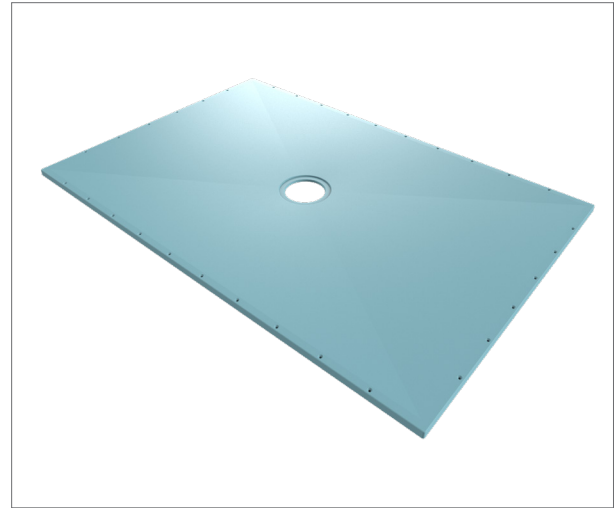

Physical Characteristics

- + Made from glass-fiber reinforced plastic (GRP)
- + Available in 12 sizes
- + Can be cut on all sides using standard power tools (remain min. 6" from drain)
- + Pitch can be extended using TruePITCH Extension panels
- + 840lbs maximum load capacity
- + Approx. weight 30lbs (depending on size)
- + Spans 16" on center joist systems
- + 4 pre-sloped gradient planes direct water flow towards drain
- + 2% per foot or greater gradients (varies due to length of pitch)
- + Perimeters are between 7/8-1" thick
- + Pre-drilled countersunk pilot holes along perimeter
- + Underside features waffle design
- + 6 1/4" drain hole diameter
- + Off-center drain position
- + Compatible with TrueDEK Classic Drains and standard drain connectors (available a la carte)
- + Can be used with underfloor heating

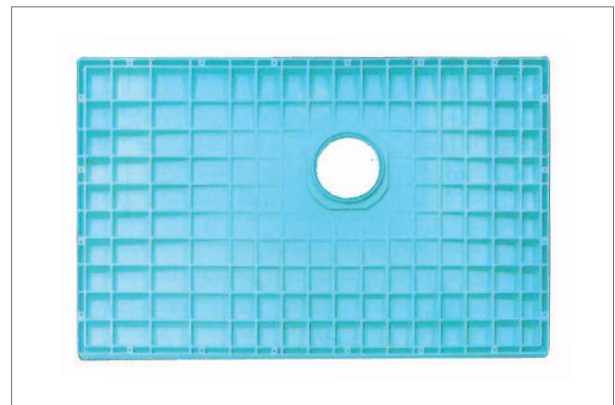

TrueDEK Classic Shower Base

Performance Characteristics

- + Curbless, barrier-free design increases safety by eliminating trip hazards and providing easy access for seniors, people with disabilities, or those in wheelchairs
- + Can be quickly and easily installed on wood or engineered joist systems, subfloor or concrete, without the need to modify joists
- + Supports up to 840lbs when installed on 16" o.c. joists supplemented with perimeter and drain hole blocking (increase load capacity with additional blocking and support)
- + Off-center drain position allows you to rotate the base to avoid conflicts between drain and any subfloor obstructions
- + Lightweight GRP features waffle underside design increases rigidity and strength, while also being lightweight to make installation easier
- + Material can be cut and drilled as needed with standard power tools
- + Enlarge length or width of pitch using TruePITCH Extension panels
- + Pre-drilled countersunk pilot holes along perimeter for quick and easy installation
- + Pre-sloped gradients ensure fast, efficient drainage which reduce the risk of pooling or flooding
- + Complete installation requires a TrueDEK Classic Drain assembly and waterproofing materials
- + Durable material ensures you can replace tile and waterproofing in the future without damaging the base



Compliance


- a. **ICC PMG-1223 lists compliance with:**
1. 2015, 2012 and 2009 International Residential Code® (IRC)
 2. 2015, 2012 and 2009 International Plumbing Code® (IPC)
 3. 2015, 2012 and 2009 Uniform Plumbing Code® (UPC)
 4. 2010 and 2005 National Plumbing Code of Canada (NPC)
 5. IAPMO PS106-2015e1 for prefabricated, tileable shower receptors
 6. CSA B45.5/IAPMO Z124-2011, Plastic Plumbing Fixtures
- b. **QAI Laboratories test report no. RJ4241-1**
1. Meets conditions of classification for 30-minute flame sp

Other Information


- + AKW limited lifetime warranty




Dimensions




16" x 16"
(Perimeter $\frac{7}{8}$ " thick)




35 1/2" x 35 1/2"
(Perimeter $\frac{7}{8}$ " thick)

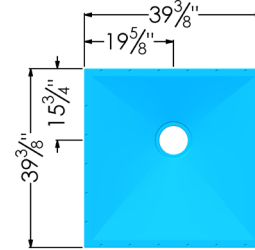


39 3/8" x 39 3/8"
(Perimeter $\frac{7}{8}$ " thick)

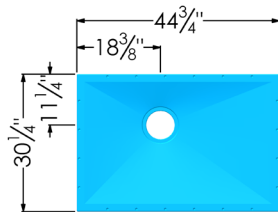


44 3/4" x 30 1/4"
(Perimeter $\frac{7}{8}$ " thick)

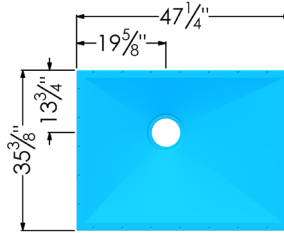


47 1/4" x 32 1/4"
(Perimeter $\frac{7}{8}$ " thick)

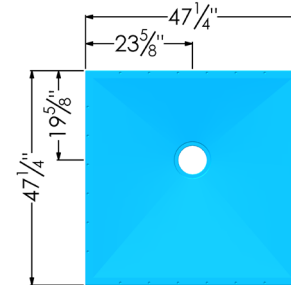


47 1/4" x 47 1/4"
(Perimeter $\frac{7}{8}$ " thick)

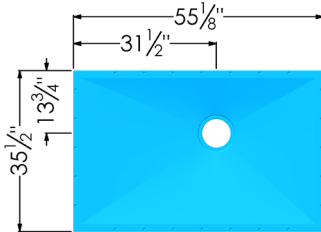


55 1/8" x 35 1/2"
(Perimeter $\frac{7}{8}$ " thick)

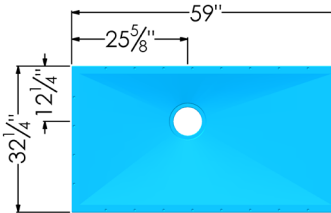


59" x 32 1/4"
(Perimeter $\frac{7}{8}$ " thick)

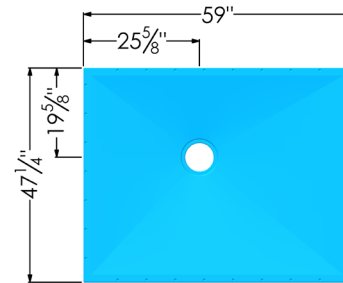


59" x 47 1/4"
(Perimeter $\frac{7}{8}$ " thick)

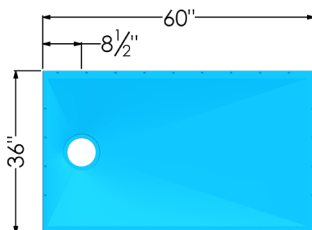

60" x 36"
(Perimeter 1" thick)

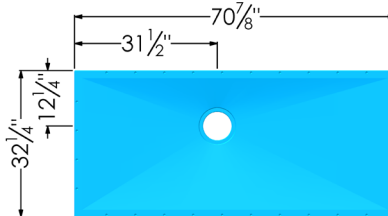

70 7/8" x 32 1/4"
(Perimeter $\frac{7}{8}$ " thick)

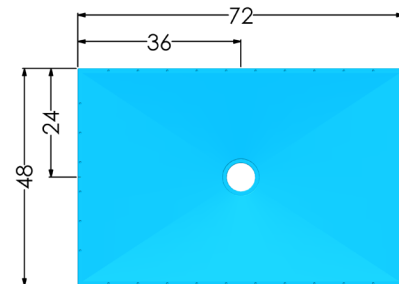

72" x 48"
(Perimeter 1" thick)

TrueDEK Classic Shower Base

Product Codes

TrueDEK Classic Shower Bases

MiniDEK 16" x 16"	21001
TrueDEK Classic 35 1/2" x 35 1/2"	21000
TrueDEK Classic 39 3/8" x 39 3/8"	21008
TrueDEK Classic 44 3/4" x 30 1/4"	21012
TrueDEK Classic 47 1/4" x 47 1/4"	21018
TrueDEK Classic 51 1/4" x 32 1/4"	21027
TrueDEK Classic 55 1/8" x 35 1/2"	21028
TrueDEK Classic 59" x 32 1/4"	21036
TrueDEK Classic 60" x 36"	21035
TrueDEK Classic 59" x 47 1/4"	21045
TrueDEK Classic 70 7/8" x 32 1/4"	21050
TrueDEK Classic 72" x 48"	21053


Waterproofing Kits

Premium Waterproofing Kit	WP1000-PRE
Pro Waterproofing Kit	WP1090-PRO

Compatible Products

TruePITCH Extension

Pre-sloped panels which allow you to extend the length/width of any TrueDEK Classic base by an additional 12" - see specification for details.

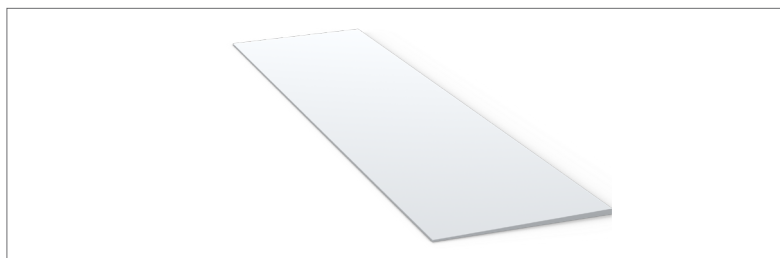

TrueDEK Classic Drains

Drains assemblies for TrueDEK Classic shower bases available in multiple color choices and designs - see specification for details.

