

Product Overview


Constructed from high quality, extruded polystyrene panels coated with cement, TrueBOARD tileable boards feature a non-itchy, fiber mesh on both sides, providing a superior waterproof surface to support ceramic wall tiles.

Unlike traditional substrates such as plywood or plasterboard which could be subject to movement due to changes in moisture, TrueBOARD will not warp or become deformed as it has been specially designed for installation in level-access bathrooms for people with disabilities.

TrueBOARD facilitates the easy mounting of mobility aids such as shower seats and grab bars, while ensuring that any water ingress from their fitting does not compromise the overall structure and maximises the lifespan of the products.

Performance Characteristics

- + Suitable for both solid and stud wall installations
- + Specifically designed for installation in level-access bathrooms for disabled people
- + Concrete coating adds strength and rigidity, creating a smooth and durable surface ideal for the application of tile adhesive and grout
- + Superior weight loading compared to other products, beneficial for the safe and secure installation of shower seats and grab bars
- + Waterproof when sealed, making it an ideal surface for decorative tile and necessary for the installation of mobility aids such as shower seats and grab bars
- + Construction and material prevent boards from warping or becoming deformed in the event of water ingress, unlike traditional substrates
- + Structure ensures tiles adhered to will not rot
- + You must use a suitable adhesive which must be fully cured and set before waterproofing or finishing with tile

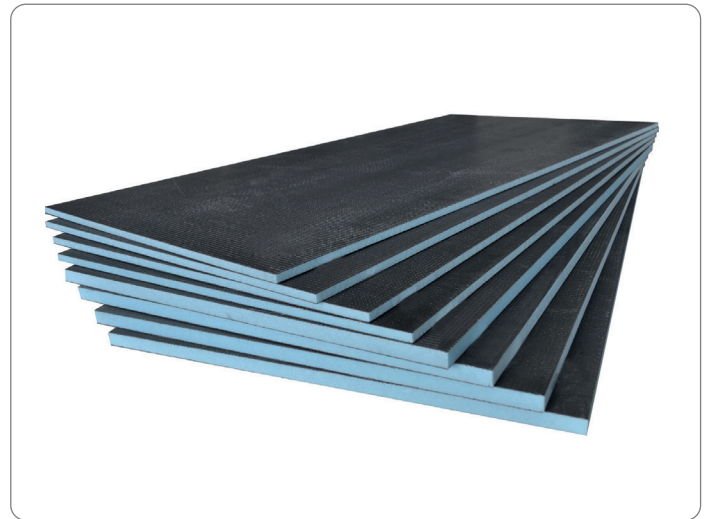

Product Code

TrueBOARD Tileable Wall Kit	27738
TrueBOARD Installation Kit	WP1080-TRU

Compliance

- + ICC-ES (PMG Listing-1332)
- + ASTM compliant when tested for fire and waterproofing

Other Information

- + AKW limited lifetime guarantee



Physical Characteristics

- + Kit includes: 6 x TrueBOARD tileable boards, 90 screws, 90 washers
- + Materials: CFC-free, closed-cell core made from Extruded Polystyrene (XPS) Rigid Foam, reinforced with fiberglass mesh on both sides and coated with a synthetic polymer resin and mortar
- + Board size: 5' x 3' x 1/2" approx. 120sq feet of coverage per kit)
- + Weight loading: Boards can support up to 132lbs; increase weight loading for the safe fitting of mobility aids by installing on supporting joists suitable for the product and user requirements
- + Lightweight, quick and easy to install
- + TrueBOARD installation kit also available, includes: 6 x Tank/10 Polyurethane Construction Adhesive

Dimensions

